


FPA - FM Class Number 4881	
WALL PANEL:	NOROC
THICKNESS:	5" - 8"
WIDTH:	36" - 42 1/2" [914 - 1080 mm]
MAX. HEIGHT:	NO LIMIT
HAIL RESISTANCE RATING:	CLASS S (SEVERE)
MIN. SUPPORT STEEL THICKNESS:	14 Ga. (0.0747 In. [1.9 mm])
MIN. SUPPORT STEEL YIELD STRESS:	50 Ksi (345 Mpa)

FASTENING SYSTEM	WIND LOAD RATING AND ZONE:	MAX. SUPPORT STEEL SPACING: (S)
FPA	85 PSF	(78")

FASTENED WITH ONE JT2-D-6-5,5/6,3 - EJOGUARD AT 5.31 IN OFF THE JOINT AND THEN EVERY 10.63 IN AND THEN 5.31 IN OFF THE OTHER JOINT (AT EVERY PURLIN SPACED 78 IN). ALSO CONTAINS A SECRET FIXED CLIP AT EVERY JOINT WITH ONE JT2-D-6-5,5/6,3 - EJOGUARD THROUGH THE NOREX-L HIDDEN PLATE (AT EVERY PURLIN AND PANEL JOINT 78 IN).

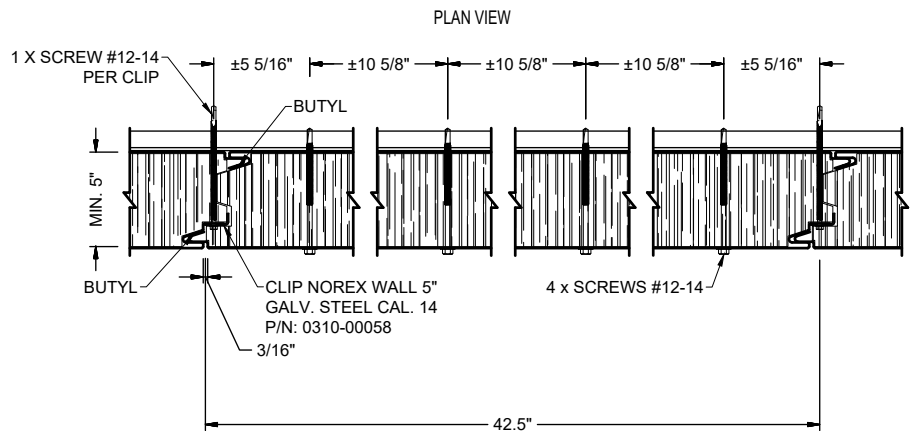

NOTE: ANY DESIGN CHANGE TO THE CLIP, THE JOINT, THE FASTENING METHOD OR THE INSULATION PROPERTIES MUST BE COMMUNICATED TO FM FOR APPROVAL.