

NORBEC™

CUSTOM DOORS

TECHNICAL SHEETS





C2L-1750

SLIDING DOOR WITH HEAVY DUTY FRAME



At Norbec, quality is paramount in product design and manufacturing processes. This new insulated sliding door design offers superior sealing and durability with advanced features. The assembly remains robust, ensuring better insulation, thermal regulation, and air barrier performance.

With a sleek design, hidden rails, and fewer visible parts, the door looks modern and clean. The rail anchored on the wall and the aluminium frame improves its weight resistance and stability, while reduced gasket friction allows smoother operation. The new lever handle makes opening easy and reduces force required.

Ideal for harsh environments (heavy duty usage, corrosive environment, moisture and strong chemicals), the sliding door meets health and building standards. It also provides ease of operation, robustness, and energy efficiency. This sliding door sets the standard for the supermarket, food processing and food service industries.

ADVANTAGES OF NORBEC SLIDING DOORS

- Highly resistant structure
- Resistant to corrosion and chemicals
- Ideal for applications that require the use of equipment such as forklifts
- Recommended for places where space is limited
- Highly customizable

WHAT'S NEW?

- > Improved gasket compression
- > A hidden rail for enhanced aesthetics with new hood option
- > Improved rail stability as the door rests directly on the wall
- > Wall guidance to clear floor for cleaning (instead of floor guide)

DOOR

The door comes equipped with all-aluminum hardware and nylon components as well as easy-to-replace EPDM gaskets. It is easy to adjust, opens and closes with minimum effort thanks to its nylon wheels mounted on sealed precision ball bearings and the wall guide located on the opening side of the door. The rail is secured* directly to the insulated metal panel wall. The door is internally reinforced with steel angles for additional strength.

* Bottom sweep may be heated for low temperature applications

FRAME

Made of 1/2" thick L-shaped custom-extruded aluminum, Norbec's unique doorframe is by far the sturdiest in the industry. The standard frame includes a thermal break. For low temperature applications a heater wire is integrated on the frame. The heater wire is covered by a removable steel cap enabling quick and easy replacement. The door frame construction is ideal for retrofitting in existing walls.

DIMENSIONS

Door thickness: 4" or 5"
Width: 36" to 120"
Height: 72" to 120"

Other dimensions may be approved upon request

HARDWARE

RAIL	TROLLEYS (2)	WALL GUIDE	SEAL GUIDE	HANDLES
Structural aluminum with optimized profile mounted directly on the wall	Nylon wheels mounted on sealed precision ball bearings	Lower part of the door guided by an aluminum extrusion fixed on the wall	Injected nylon parts that ensure perfect seal when door is closed	Exterior & Interior: lever handle To ensure low effort opening


OPTIONAL ACCESSORIES

- Self-closing gravity system with hold-open and anti-bounce devices (available for 42" to 96" openings)
 - Protection kick plates
 - 18 or 16 gauge galvanized steel
 - 14, 16 or 18 gauge stainless steel # 2B
 - Aluminum tread plate 1/16", 1/8" or 3/16"
 - Security lock system
 - Recessed threshold to be embedded into the concrete slab for freezers. Additionally, the heater wire is easily accessible.
- Hood option covering the rail and wheels to prevent dust accumulation and enhance aesthetic. Available in stainless steel or identical to the room finish
 - Extension of door jamb into concrete slab for superior strength
 - Meat rail opening
 - Door guard made of 3/8" steel angle anchored to the floor
 - Heated door & frame (low temperature applications)
 - Heated window (low temperature applications)
- Other options may be approved upon request.

INSTALLATION

The frame is designed to be installed in a wall opening cut on the field. The opening in the wall should be 1 1/2" wider and 1" higher than the clear opening of the door, including clearance for adjustment. The front of the frame must be bolted through the wall with carriage bolts that join the rear of the frame. The frame, the rail and the wall guide are pre-drilled and positioned as indicated on the layout provided below. The door, frame and hardware are all supplied and arrive separately on site. Once installed, adjustments are required to ensure proper operation as indicated in the installation guide. Floor-to-wall angle reinforcements provided shall be added inside to the left and right sides of the doorframe to stabilize the assembly.

TECHNICAL DETAILS

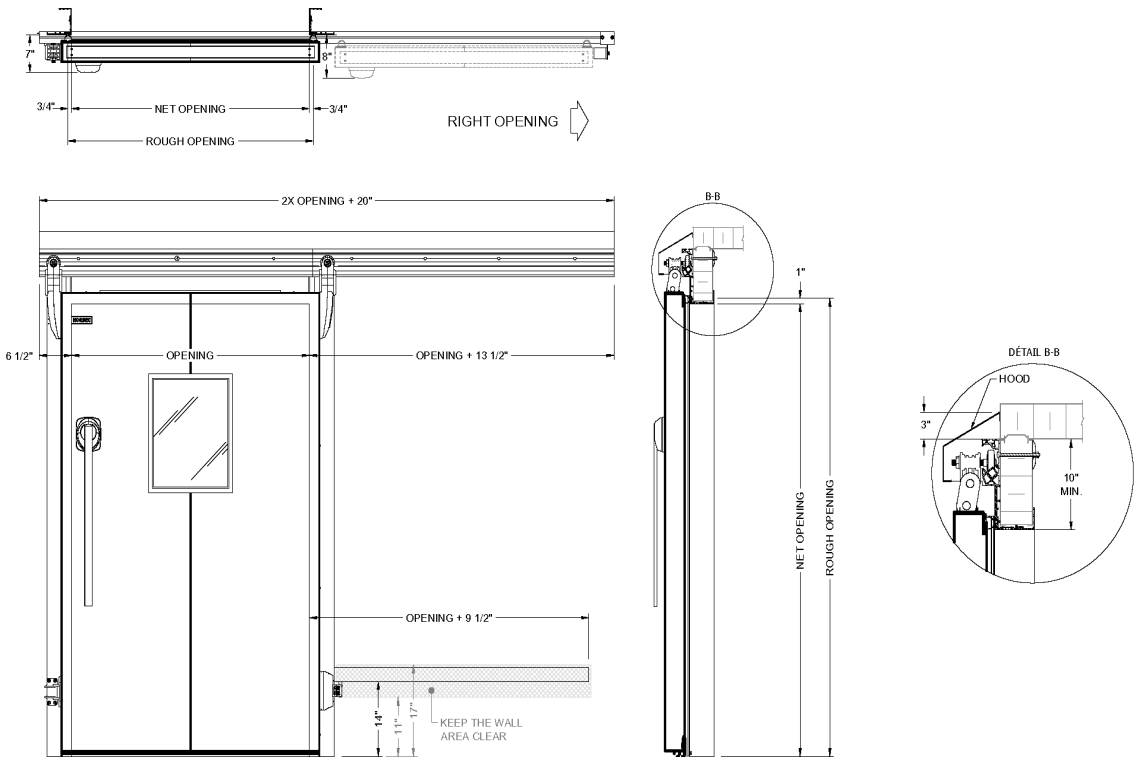



C2L-1750-E

ELECTRIC SLIDING DOOR EQUIPPED WITH THE E-CIRCUIT SYSTEM



In addition to providing good insulation properties and enhanced airtight sealing, the C2L-1750-E gives you the automation you need to improve your day-to-day operations. Over time, Norbec sliding doors have become a standard in the supermarket, food service and food processing industry for their ease of operation, robustness and energy efficiency.

This ultra sturdy and durable door equipped with the Electric E-Circuit System guarantees you greater efficiency and agility in your activities while ensuring employee safety. Meeting the most stringent health and designed according to a rigorous design process, the C2L-1750-E is a safe and reliable product.

ADVANTAGES OF NORBEC ELECTRIC SLIDING DOORS

- › Automated opening; easy to install
- › Highly resistant structure
- › Ideal for applications that require the use of equipment such as forklifts
- › Resistant to corrosion and chemicals
- › Recommended for places where space is limited

WHAT'S NEW?

- > Improved gasket compression
- > A hidden rail for enhanced aesthetics with new hood option
- > Improved rail stability as the door rests directly on the wall

DIMENSIONS

Door thickness: 4" | Width: 36" to 84" | Height: 72" to 96"* *Other dimensions may be approved upon request

HARDWARE

RAIL	TROLLEYS (2)	WALL GUIDE	SEAL GUIDE	HANDLES
1/4" thick structural aluminum and 1/2" brackets	Nylon wheels mounted on sealed precision ball bearings	Lower part of the door guided by an aluminum extrusion fixed on the wall	Injected nylon parts that ensure perfect seal when door is closed	Exterior & Interior: lever handle

OPTIONAL ACCESSORIES

- › Protection kick plates
 - 18 or 16 gauge galvanized steel
 - 14, 16 or 18 gauge stainless steel # 2B
 - Aluminum tread plate 1/16", 1/8" or 3/16"
- › Extension of door jamb into concrete slab for superior strength
- › Door guard made of 3/8" steel angle anchored to the floor
- › Hood option covering the rail and wheels to prevent dust accumulation and enhance aesthetic. Available in stainless steel or identical to the room finish
- › Recessed threshold to be embedded into the concrete slab for freezers. Heater wire is covered by a 3/8" thick aluminum plate
- › Heated door & frame (low temperature applications)
- › Heated window (low temperature applications)

For door and frame details, please refer to the C2L-1750 technical sheet available at norbec.com.

ELECTRIC E-CIRCUIT SYSTEM

The E-Circuit is a fully assembled, ready-to-use monobloc system. Designed to streamline your daily operations through automation functions, this system is ideal for use in food processing plants.

SPECIFICATIONS OF THE E-CIRCUIT

- Adjustable speed: max 0.18m/sec [7"/sec]
- Operating temperature: -10°C to 40°C [14°F to 104°F]
- Waterproof box, protection IP 65
- Power supply 120Vac - 60Hz
- 150W Power transformer
- 24Vdc motorization
- Electric opening and closing integrated to the system
- Automatic closing with adjustable time delay
- Safety edge nose to prevent injuries
- Complete monobloc unit, factory-wired and ready to use
- Easy and intuitive programming
- Quiet system

OPTIONAL ACTIVATION ACCESSORIES

- Radio-controlled opening and closing push button
- Radio-controlled pullcord
- Non-contact opening movement detector
- Photoelectric safety barrier


Retrofit
Option
Available!

INSTALLATION

The frame is designed to be installed in an existing wall. The opening in the wall should be 1 ½" wider and 1" higher than the clear opening of the door, including clearance for adjustment. The front of the frame must be bolted through the wall with the hardware provided, that join the rear of the frame. The wall guide should be fixed to the wall and positioned to ensure proper operation. The E-circuit system is pre-assembled on the door. The addition of the limit stops, the drive belt and the transformer box must be installed and adjusted to ensure proper operation.

For detailed installation instructions, please refer to the C2L-1750-E installation guide available at norbec.com.

TECHNICAL DETAILS

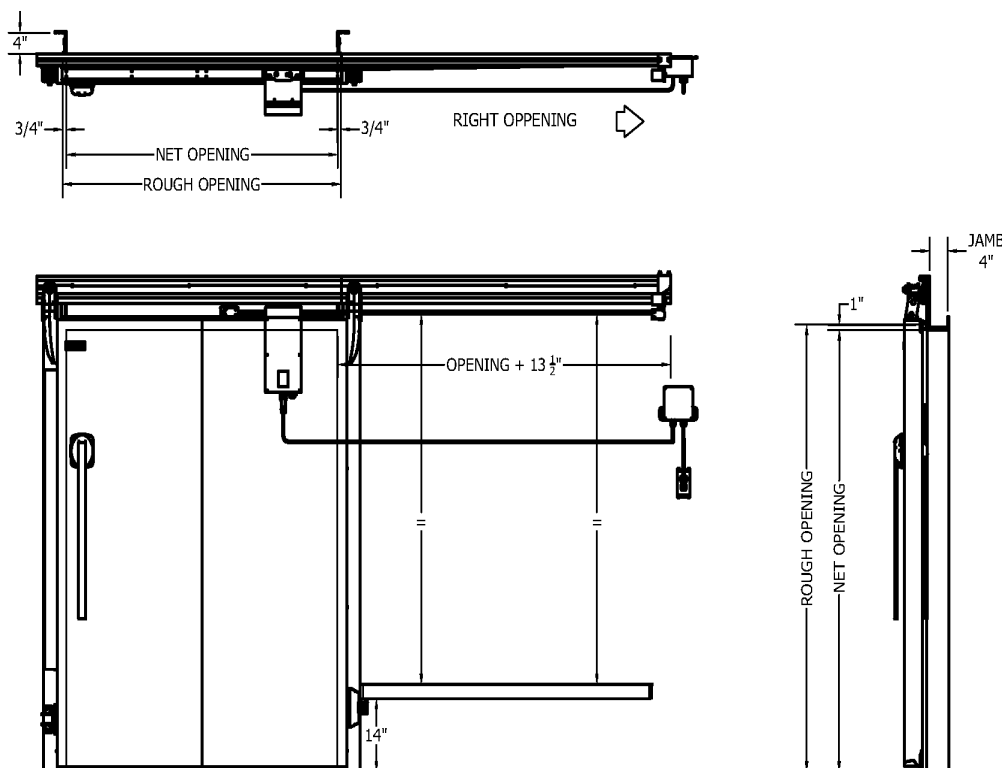



C2P-140

SLIDING DOOR WITH CAMLOCK PANEL



The materials used in the manufacture of sliding doors are sturdy and provide superior sealing. Each door is individually designed and manufactured in-house. From designing to manufacturing, the concern for quality is vital in product development.

In addition to providing good insulation properties and enhanced airtight sealing, the new insulated sliding doors are designed to withstand daily activities throughout the years. They are manufactured for the most demanding environments (heavy duty usage, high salinity, moisture and strong chemicals). Norbec considers industry regulations such as health standards, energy standards and building standards throughout the entire process.

ADVANTAGES OF NORBEC SLIDING DOORS

- Highly resistant structure
- Resistant to corrosion and chemicals
- Ideal for applications that require the use and handling of equipment such as forklifts
- Recommended for places where space is limited
- Available with gravity or manual closure (locking option in open position)

WHAT'S NEW?

- > Improved sealing with reduced gasket friction
- > A hidden rail for enhanced aesthetics
- > Improved rail stability as the door rests directly on the wall

DOOR

The door comes equipped with all-aluminum and nylon hardware as well as easy-to-replace EPDM gaskets. It is easy to adjust and opens and closes with minimum effort, thanks to its nylon wheels mounted on sealed precision ball bearings and **its nylon stay roller located out of the way under the door**. The rail is attached directly to the doorframe, reinforced on the inside with steel plates. The door is internally reinforced with steel angles for added strength.

FRAME

The door is mounted directly to a 47" wide camlock panel with an impact-resistant Polyvinyl Chloride (PVC) stud that acts as a thermal barrier. A groove is integrated to allow easy access to the heating wire. All the pre-spun components in the frame are grouped together at a single point of connection.

DIMENSIONS

Door thickness: 4" or 5"
Width: 24" to 42"
Height: 72" to 120"

Other dimensions available upon request

HARDWARE

RAIL	TROLLEYS (2)	WALL GUIDE	SEAL GUIDE	HANDLES
¼" thick structural aluminum and 1/2" brackets	Nylon wheels mounted on sealed precision ball bearings	Lower part of the door guided by an aluminum extrusion fixed on the wall guide	Aluminum molded parts that ensure perfect seal when door is closed	Exterior & Interior: lever handle

OPTIONAL ACCESSORIES


- Kick plates or corner guard on door
 - 18 or 16 gauge galvanized steel
 - 14, 16 or 18 gauge stainless steel # 2B
 - Aluminum tread plate 1/16", 1/8" or 3/16"
 - Security lock system
 - Hood option covering the rail and wheels to prevent dust accumulation and enhance esthetic. Available in stainless steel or identical to the room finish
- Recessed threshold to be sunk into the concrete slab for freezers. Heater wire is covered by a 3/8" thick aluminum plate
 - Extension of door jamb into concrete slab for superior strength
 - Door guard made of 3/8" steel angle anchored to the floor
 - Heated door frame
 - Lever handle

Other options available upon request

INSTALLATION

The panels are fixed by cam-friction fasteners and the frame is integrated into a panel. An angle of attachment will be added on each side of the frame to the floor, on the inside. The assembled rail shall be anchored to the doorframe with factory positioned bolts. The wall guide shall be fixed to the wall and positioned as indicated on the layout provided. The door, frame and hardware are all supplied and arrive separately on site. Once installed, adjustments are required to ensure proper operation as indicated in the installation guide.

TECHNICAL DETAILS

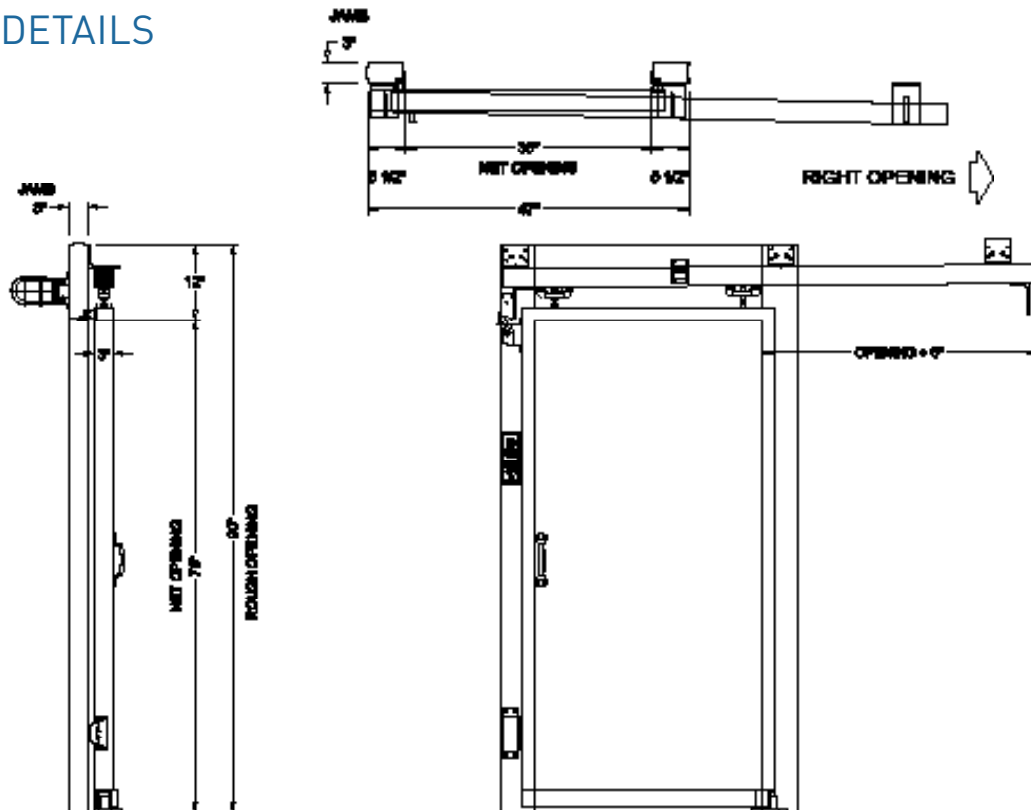



PL-1750

HINGED DOOR



The materials used in the manufacture of hinged doors are sturdy and provide superior sealing. Each door is individually designed and manufactured in-house. From designing to manufacturing, the concern for quality is vital in product development.

In addition to providing good insulation properties and enhanced waterproof seal, the doors are designed to withstand daily activities throughout the years. They are manufactured for the most demanding environments (heavy duty usage, high salinity, moisture and strong chemicals). Norbec considers industry regulations such as health standards, energy standards and building standards throughout the entire process.

ADVANTAGES OF NORBEC HINGED DOORS

- Highly resistant structure
- Easy and quick installation
- Several options available for multiple applications
- Resistant to corrosion and chemicals
- Ease of maintenance

DOOR

This offset door is designed so that the outer and inner walls are mechanically assembled to prevent delamination during repeated impacts. Gaskets are easily replaceable in addition of being resistant to grease and detergents. Doors are equipped with galvanized steel reinforcement at the anchor points of the hardware to ensure durability.

FRAME

Constructed from 1/2" thick "L" aluminum profiles, this unique door frame is by far the most robust in the industry. It is provided with a thermal break. The freezer frame is equipped with a heating wire totally integrated in the profile and covered by a molding that facilitates its replacement. The profiled aluminum sill is provided with a double heating wire.

DIMENSIONS

Door thickness: 3", 4" or 5"
Width: 24" to 60"
Height: 72" to 192"

Other dimensions available upon request

HARDWARE

HINGES	HANDLES	INTERIOR PUSH BAR
2 Kason #1245 (for doors under 48") or 2 Kason #1277	Kason #78 brushed chrome	Kason #481 glow-in-the-dark knob

OPTIONS

- Protection kick plates

 - 18 or 16 gauge galvanized steel
 - 14,16 or 18 gauge stainless steel # 2B
 - Aluminum treadplate 1/16", 1/8" ou 3/16"
- ST-1000 independent surface threshold for freezers. Heater wire is covered by a 3/8" thick aluminum plate

➤ RT-1000 independent recessed threshold in the concrete slab
Heater wire is covered by a 3/8" thick aluminum plate

➤ "L" shaped threshold for doors without door broom


➤ Extension of door jamb into concrete slab for more strength

➤ Windows
- Other options available upon request.

INSTALLATION

The frame is designed to be installed in an existing wall. The opening in the wall should be 1 1/2" wider and 1" higher than the clear opening of the door, including clearance for adjustment. The front of the frame must be bolted through the wall with carriage bolts that join the rear of the frame. The frame mounting holes are pre-drilled at the factory. Bolts, nuts, washers and finish caps are supplied with the door. Reinforcement angles must be added inside the left and right sides of the door frame.

TECHNICAL DETAILS

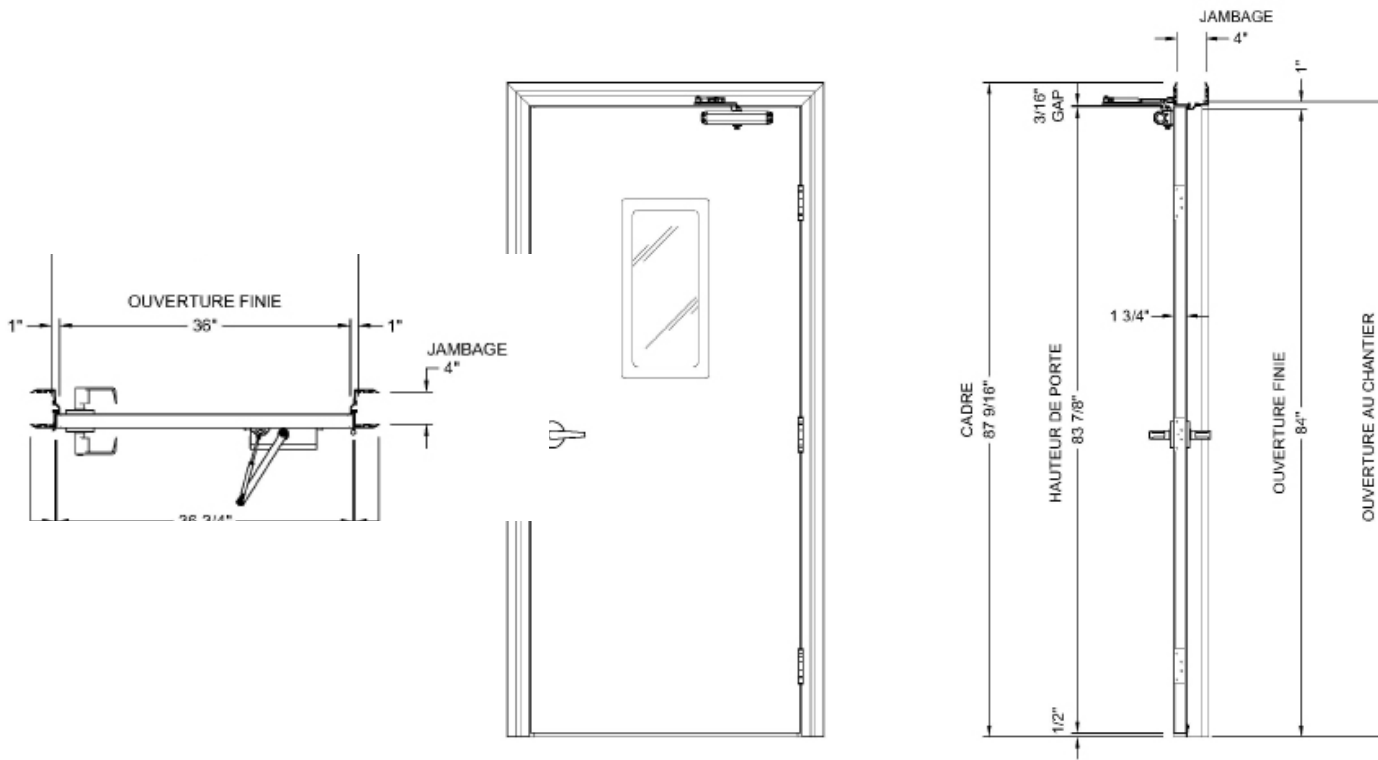



PL-1750-D

BI-PARTITION HINGED DOOR



The materials used in the manufacture of hinged doors are sturdy and provide superior sealing. Each door is individually designed and manufactured in-house. From designing to manufacturing, the concern for quality is vital in product development.

In addition to providing good insulation properties and enhanced waterproof seal, the doors are designed to withstand daily activities throughout the years. They are manufactured for the most demanding environments (heavy duty usage, high salinity, moisture and strong chemicals). Norbec considers industry regulations such as health standards, energy standards and building standards throughout the entire process.

ADVANTAGES OF NORBEC HINGED DOORS

- Highly resistant structure
- Easy and quick installation
- Several options available for multiple applications
- Resistant to corrosion and chemicals
- Ease of maintenance

DOOR

This flush door is designed so that the outer and inner walls are mechanically assembled to prevent delamination during repeated impacts. Gaskets are easily replaceable in addition of being resistant to grease and detergents. Doors are equipped with galvanized steel reinforcement at the anchor points of the hardware to ensure durability.

FRAME

Constructed from 1/2" thick "L" aluminum profiles, this unique door frame is by far the most robust in the industry. It is provided with a thermal break. The freezer frame is equipped with a heating wire totally integrated in the profile and covered by a molding that facilitates its replacement. The profiled aluminum sill is provided with a double heating wire.

DIMENSIONS

Door thickness : 3", 4" or 5"
Width: 48" to 120"
Height: 72" to 192"

Other dimensions available upon request

HARDWARE

HINGES	HANDLES	INTERIOR PUSH BAR	BOLT SPRING
2 Kason #1245 (for doors under 48") or 2 Kason #1277	Kason #78 brushed chrome	Kason #481 glow-in-the-dark knob	Wilcox #514X2 et #524X0


OPTIONS

- Protection kick plates
 - 18 or 16 gauge galvanized steel
 - 14,16 or 18 gauge stainless steel # 2B
 - Aluminum tread plate 1/16", 1/8" ou 3/16"
 - ST-1000 independent surface threshold for freezers. Heater wire is covered by a 3/8" thick aluminum plate.
- RT-1000 independent recessed threshold in the concrete slab
 - Heater wire is covered by a 3/8" thick aluminum plate
 - "L" shaped threshold for doors without door broom
 - Extension of door jamb into concrete slab for superior strength
 - Windows
- Other options available upon request.

INSTALLATION

The frame is designed to be installed in an existing wall. The opening in the wall should be 1 1/2" wider and 1" higher than the clear opening of the door, including clearance for adjustment. The front of the frame must be bolted through the wall with carriage bolts that join the rear of the frame. The frame mounting holes are pre-drilled at the factory. Bolts, nuts, washers and finish caps are supplied with the door. Reinforcement angles must be added inside the left and right sides of the door frame.

TECHNICAL DETAILS

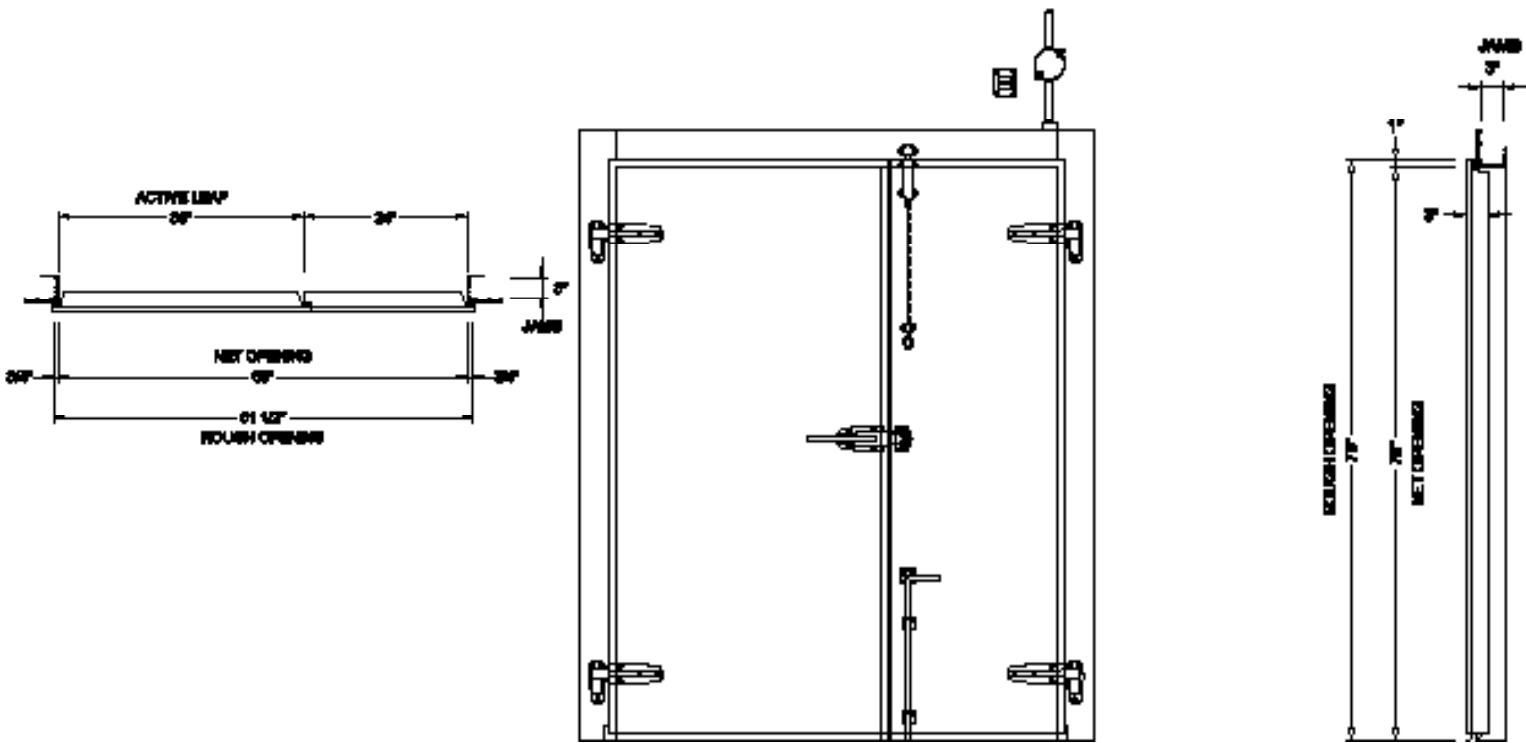



INSULATED METAL PERSONNEL DOOR

HC-200



DOUBLE-LEAF
Option
Available!

HC-200 polyurethane core steel service doors are designed specifically for use in food processing and passage areas, offices, restrooms and other amenities as well as interior grow rooms and horticulture facilities. These doors are designed to ensure safe foot traffic between your various installations.

From designing to manufacturing, the concern for quality is vital in product development.

ADVANTAGES OF NORBEC METAL PERSONNEL DOORS

- › Quick and easy installation
- › Standardized turnkey offer (pre-selected hardware factory assembled)
- › Ease of maintenance
- › Adapted to food processing environments

DOOR

This 1 3/4" thick metal personnel door is available in standard opening sizes, in single or double configuration. The **HC-200** polyurethane injected with pre-painted steel faces comes pre-assembled in the frame. The Silkline (striated) finish and choice of different colors match our interior insulated metal panel offering for the most aesthetically pleasing finish.

FRAME

The non-apparent screws of this unique "L" shaped frame constructed from .100" thick aluminum extrusions allow for a clean finish. The design of the frame reduces dust accumulation and makes it easy to clean. In addition, the periphery of the opening is equipped with a compressible silicone gasket to ensure a tight sealing. This frame is also delivered in two pieces (front and back) for easy installation in an existing opening and leveling on site. Available for several wall thicknesses, the steel service door can be installed in a wide variety of projects.

COATINGS

- › Pre-painted galvanized Silkline (striated) 26 gauge
 - Interior White (5216)
 - Imperial White
 - Bright White
- › Advantica-L® Smooth or Silkline (striated), 24 gauge
- › Pre-painted galvanized Smooth 24 gauge
 - Interior White (5216)
 - Imperial White
 - Bright White
- › Smooth stainless steel, 22 gauge

Other coatings are available upon request.

DIMENSIONS

Door thickness: 1 3/4"

Opening width:

Single leaf: 30, 32, 36 and 42"

Double leaf: 61 1/2" or 73 1/2"

Opening height: 84"

Compatible wall thicknesses: 3 and 4"

STANDARD CONFIGURATION

LEVER HANDLE	CLOSER	HINGES	GASKET	SWEEP
Passage handle (without lock) with galvanized steel interior mechanism and stainless steel exterior finish.	Adjustable speed closer with satin aluminum finish installed on the outside.	3 removable steel hinges with brushed chrome finish per leaf.	Compressible silicone seal adhered to the frame.	Neoprene door sweep installed on the inside.


OPTIONAL ACCESSORIES

- Stainless steel hinges
 - Entrance lever handle (with lock)
 - Panic bar with thumbpiece trim (without lock)
 - Panic bar with thumbpiece trim (with lock)
- 12" x 24" viewport (polycarbonate)
 - 18" stainless steel kick plate (interior and exterior)
 - Stainless steel surface mounted automatic door bottom
 - Electrical strike*
Voltage: 12/24 VDC/VAC
- *Available for single leaf only with the lever handle store room function

INSTALLATION

Installation of the **HC-200** door is a one-man job, quick and easy. The frame design allows for installation in a field-cut opening without the need for additional reinforcement. The opening in the wall must be 2" wider and 1" higher than the door opening. The front frame (on which the door is pre-mounted) is inserted into the opening and held in place by self-drilling screws installed in the front. The rear frame is inserted into the front frame and is also screwed into the front. These screws are then concealed with a PVC strip.

TECHNICAL DETAILS

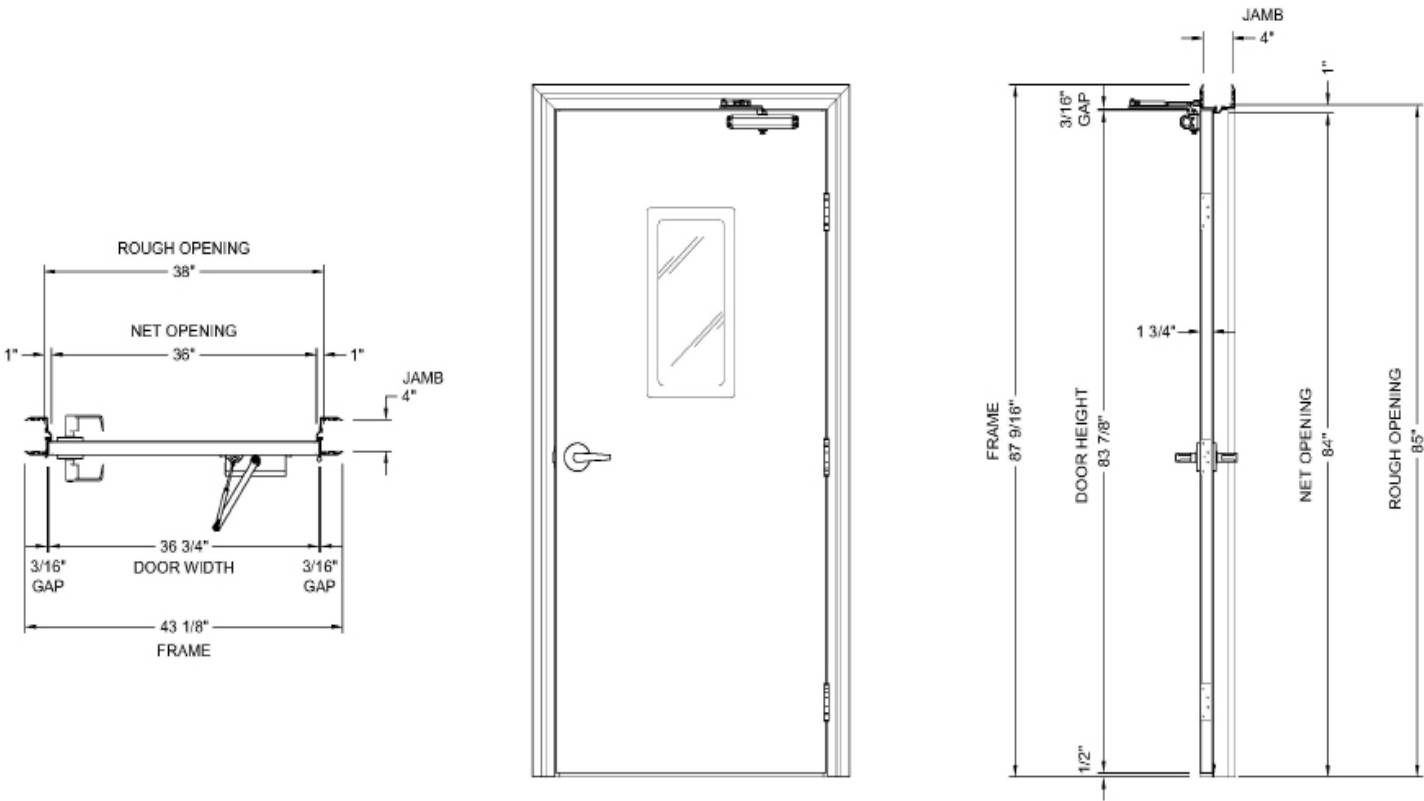



B2L-1750

HINGED DOOR FOR BLAST COOLER OR FREEZER



The materials used in the manufacture of hinged doors for blast freezer or cooler are strong and provide a 3-point locking system for superior sealing. Each door is individually designed and manufactured in-house. From designing to manufacturing, the concern for quality is vital in product development.

In addition to providing good insulation properties and enhanced waterproof seal, the doors are designed to withstand extreme temperature variations. They are manufactured for the most demanding environments (heavy duty usage, high salinity, moisture and strong chemicals). Norbec considers industry regulations such as health, energy and construction standards throughout the entire process.

ADVANTAGES OF NORBEC HINGED DOORS

Highly resistant structure
Easy and quick installation
Resistant to corrosion and chemicals

Ease of maintenance
3-point locking system

DOOR

This full overlap door is designed to ensure a superior insulation and seal. The outer and inner walls are mechanically assembled to prevent delamination during repeated impacts. Gaskets are easily replaceable in addition of being resistant to grease and detergents. Doors are equipped with galvanized steel reinforcement at the anchor points of the hardware to ensure maximum durability.

FRAME

Constructed from 1/2" thick "L" aluminum profiles, this unique door frame is by far the most robust in the industry. It is provided with a thermal break. The frame is equipped with a heating wire totally integrated in the profile and covered by a molding that facilitates its replacement.

DIMENSIONS

Door thickness: 4" or 5"
101 or 127 mm
Width: 36" to 60"
914 to 1524 mm
Height: 72" to 96"
1829 à 2438 mm

Other dimensions available upon request

HARDWARE

HINGES	DOOR FASTENER
3 hinges in composite material (Intertecnica #2830)	Stainless steel rotating handle with 3 point lock (Intertecnica #6250)

OPTIONAL ACCESSORIES


- Protection kick-plates
 - 18 or 16 gauge galvanized steel
 - 14,16 or 18 gauge stainless steel # 2B
 - Aluminum tread plate 1/16", 1/8" ou 3/16"
 - ST-1000 independent surface threshold for freezers. Heater wire is covered by a 3/8" thick aluminum plate.
- RT-1000 independent recessed threshold in the concrete slab
 - Heater wire is covered by a 3/8" thick aluminum plate
 - "L" shaped threshold for doors without door sweep
 - Extension of door jamb into concrete slab for superior strength
 - Kason #199: Consists of one inside push release handle with two point strikes and one outside pull release handle

Other options available upon request.

INSTALLATION

The frame is designed to be installed in an existing wall. The opening in the wall should be 1 1/2" wider and 1" higher than the clear opening of the door, including clearance for adjustment. The front of the frame must be bolted through the wall with carriage bolts that join the rear of the frame. The frame mounting holes are pre-drilled at the factory. Bolts, nuts, washers and finish caps are supplied with the door. Reinforcement angles must be added inside the left and right sides of the door frame.

TECHNICAL DETAILS

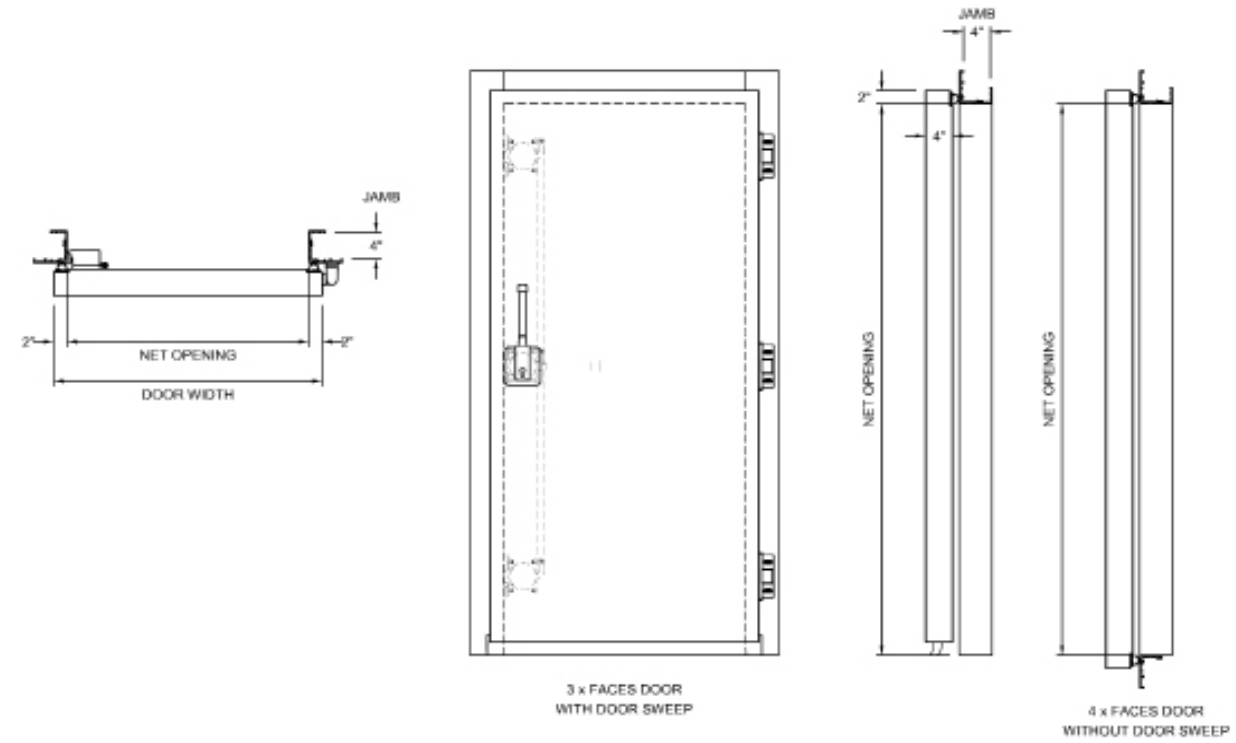



PP-130

HINGED DOOR



The materials used in the manufacture of hinged doors are sturdy and provide superior sealing. Each door is individually designed and manufactured in-house. From designing to manufacturing, the concern for quality is vital in product development.

In addition to providing good insulation properties and enhanced waterproof seal, the doors are designed to withstand daily activities throughout the years. They are manufactured for the most demanding environments (heavy duty usage, high salinity, moisture and strong chemicals). Norbec considers industry regulations such as health standards, energy standards and building standards throughout the entire process.

ADVANTAGES OF NORBEC HINGED DOORS

- › Highly resistant structure
- › Easy and quick installation
- › Several options available for multiple applications
- › Resistant to corrosion and chemicals.
- › Easy maintenance

DOOR

This offset door is designed so that the outer and inner walls are mechanically assembled to prevent delamination during repeated impacts. Polyvinyl seals are easily replaceable. A single leaf door can be manufactured up to 36" wide.

FRAME

The door is mounted directly to a 47" wide camlock panel with a 1/4" aluminum jamb that incorporates a thermal break under the seal and a groove for easily accessible heating wire. All the pre-spun components in the frame are grouped together at a single point of connection.

DIMENSIONS

Door thickness: 3", 4" or 5"
Width: 24" to 42"
Height: 72" to 120"

Other dimensions available upon request

HARDWARE

HINGES	HANDLES	PRESSURE RELIEF VALVE FOR FREEZER	PREWIRED PILOT SWITCH	DIAL THERMOMETER
2 spring loaded hinges Kason #1245 (3 hinges if more than 84")	Kason #78	Kason #1825		


OPTIONAL ACCESSORIES

- Nylon spring loaded hinges Kason #1248
 - Magnetic joints with Heavy duty lever locking handle Kason #1236
 - Spring action door closer Kason #1095 or hydraulic door closer #1092 (for magnetic gasket joints only)
 - Foot treadle (for magnetic gasket joints only)
- Windows
 - Protection kick plates
 - 18 or 16 gauge galvanized steel
 - 14,16 or 18 gauge stainless steel # 2B
 - Aluminum tread plate 1/16", 1/8" or 3/16"
 - Panic bar with pull handle
- Other options available upon request.

INSTALLATION

The panels are fixed with cam-lock fasteners and the frame is integrated into a panel. A reinforcing angle will be added on each side of the frame to the floor, on the inside.

TECHNICAL DETAILS

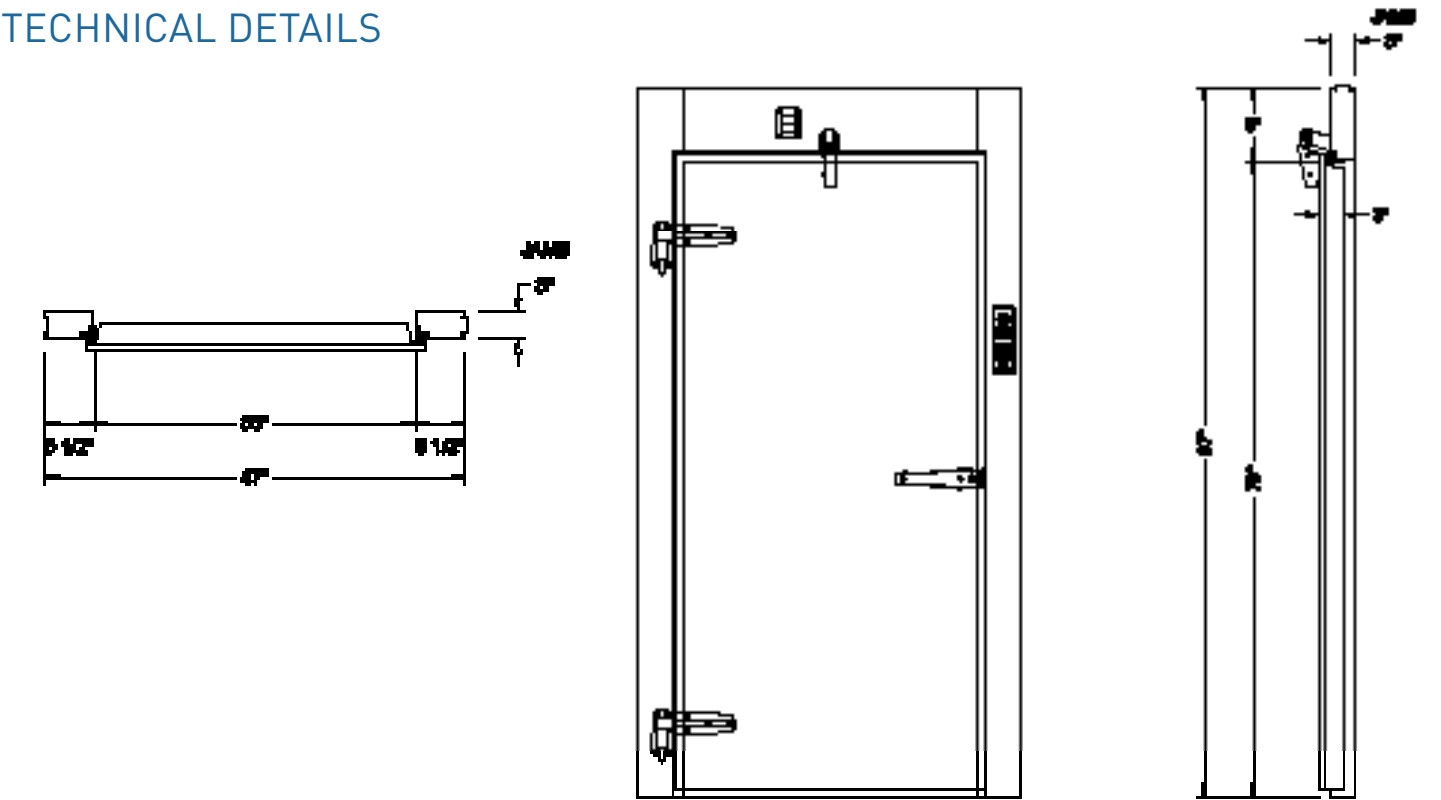



PP-345

HINGED DOOR



The materials used in the manufacture of hinged doors are sturdy and provide superior sealing. Each door is individually designed and manufactured in-house. From designing to manufacturing, the concern for quality is vital in product development.

In addition to providing good insulation properties and enhanced waterproof seal, the doors are designed to withstand daily activities throughout the years. They are manufactured for the most demanding environments (heavy duty usage, high salinity, moisture and strong chemicals). Norbec considers industry regulations such as health standards, energy standards and building standards throughout the entire process.

ADVANTAGES OF NORBEC HINGED DOORS

- › Highly resistant structure
- › Easy and quick installation
- › Several options available for multiple applications
- › Resistant to corrosion and chemicals
- › Easy maintenance

DOOR

This flush door is designed so that the outer and inner walls are mechanically assembled to prevent delamination during repeated impacts. Polyvinyl seals are easily replaceable. A single leaf door can be manufactured up to 36" wide.

FRAME

The door is mounted directly to a 47" wide cam-lock panel with an impact-resistant Polyvinyl Chloride (PVC) stud that acts as a thermal barrier. A groove is integrated to allow easy access to the heating wire. All the pre-spun components in the frame are grouped together at a single point of connection.

DIMENSIONS

Door thickness: 3", 4" or 5"
Width: 24" to 42"
Height: 72" to 120"

Other dimensions available upon request

HARDWARE

HINGES	HANDLES	PRESSURE RELIEF VALVE FOR FREEZER	SPRING LOADED DOOR CLOSER	PREWIRED PILOT SWITCH	DIAL THER- MOMETER
2 spring loaded hinges Kason #1245 (3 hinges if more than 84")	Kason #1229	Kason #1825	Kason #1095		


OPTIONAL ACCESSORIES

- Nylon spring loaded hinges Kason #1245
 - Heavy duty lever locking handle Kason #1236
 - Spring action door closer Kason #1095
 - Foot treadle (for magnetic gasket joints only)
 - Windows
- Protection kick plates
 - 18 or 16 gauge galvanized steel
 - 14, 16 or 18 gauge stainless steel # 2B
 - Aluminum tread plate 1/16", 1/8" or 3/16"
 - Panic bar with pull handle
- Other options available upon request.

INSTALLATION

The panels are fixed with camlock fasteners and the frame is integrated into a panel. A reinforcing angle will be added on each side of the frame to the floor, on the inside.


TECHNICAL DETAILS

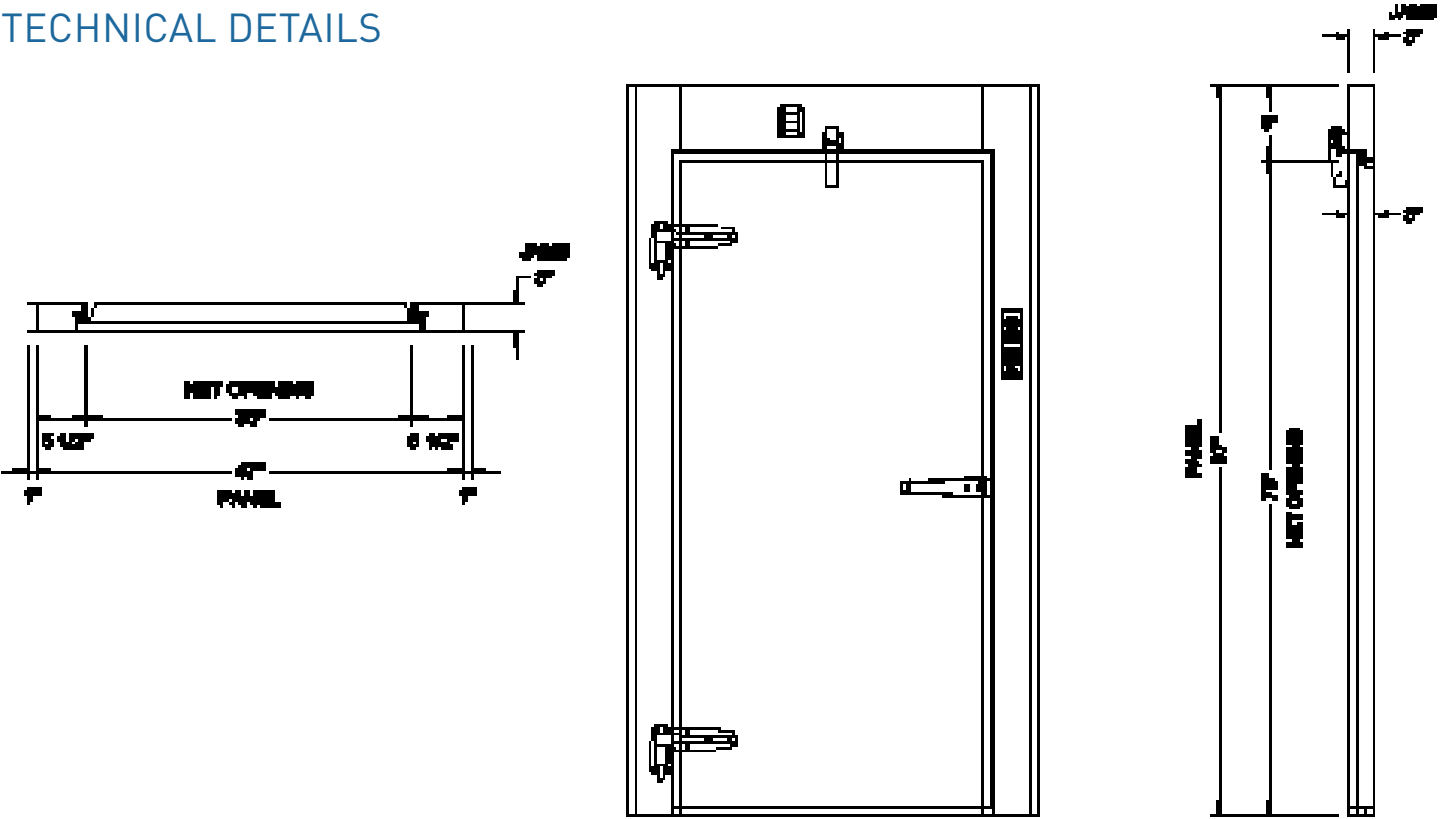



PP-340

HINGED DOOR

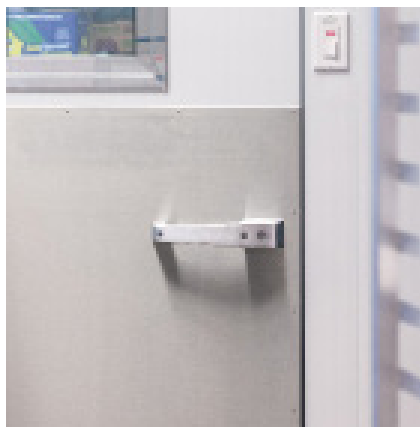

The materials used in the manufacture of hinged doors are sturdy and provide superior sealing. Each door is individually designed and manufactured in-house. From designing to manufacturing, the concern for quality is vital in product development.

In addition to providing good insulation properties and enhanced waterproof seal, the doors are designed to withstand daily activities throughout the years. They are manufactured for the most demanding environments (heavy duty usage, high salinity, moisture and strong chemicals). Norbec considers industry regulations such as health standards, energy standards and building standards throughout the entire process.

ADVANTAGES OF NORBEC HINGED DOORS

- › Highly resistant structure
- › Easy and quick installation
- › Several options available for multiple applications
- › Resistant to corrosion and chemicals
- › Easy maintenance

DOOR

This offset type door is designed so that the outer and inner walls are mechanically assembled to prevent delamination during repeated impacts. Polyvinyl seals are easily replaceable. A single leaf door can be manufactured up to 36" wide.

FRAME

The door is mounted directly to a 47" wide cam-lock panel with an impact-resistant Polyvinyl Chloride (PVC) stud that acts as a thermal barrier. A groove is integrated to allow easy access to the heating wire. All the pre-spun components in the frame are grouped together at a single point of connection.

DIMENSIONS

Door thickness: 3", 4" or 5"
Width: 24" to 42"
Height: 72" to 120"

Other dimensions available upon request

HARDWARE

HINGES	HANDLES	PRESSURE RELIEF VALVE FOR FREEZER	SPRING LOADED DOOR CLOSER	PREWIRED PILOT SWITCH	DIAL THER- MOMETER
2 spring loaded hinges Kason #1245 (3 hinges if more than 84")	Kason #1229	Kason #1825	Kason #1095		


OPTIONAL ACCESSORIES

- Nylon spring loaded hinges Kason #1245
 - Heavy duty lever locking handle Kason #1236
 - Spring action door closer Kason #1095
 - Foot treadle
 - Windows
- Protection kick plates
 - 18 or 16 gauge galvanized steel
 - 14,16 or 18 gauge stainless steel # 2B
 - Aluminum threadplate 1/16", 1/8" ou 3/16"
 - Panic bar with pull handle
- Other options available upon request.

INSTALLATION

The panels are fixed with cam-lock fasteners and the frame is integrated into a panel. A reinforcing angle will be added on each side of the frame to the floor, on the inside.

TECHNICAL DETAILS

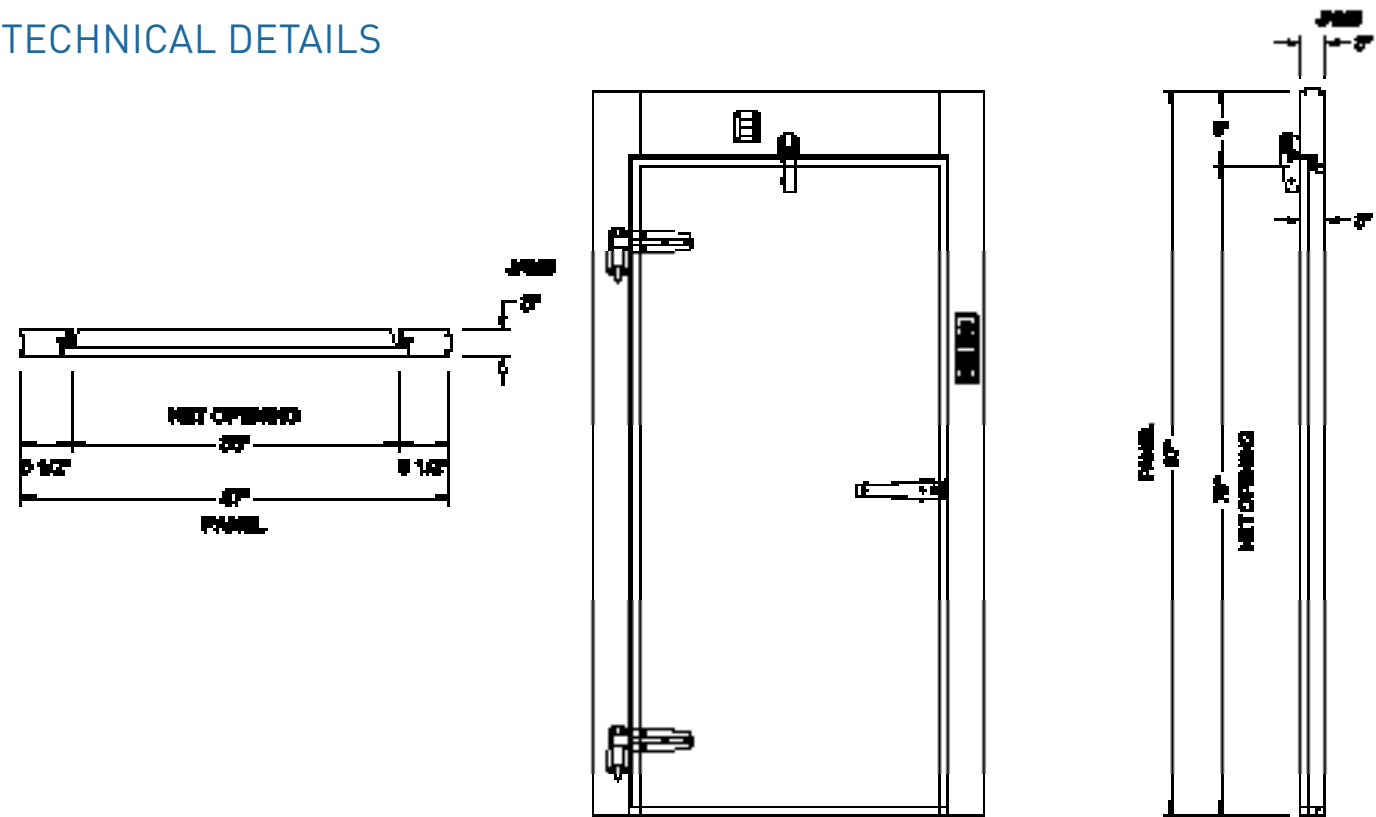



SP-130

HINGED SERVICE DOOR



The materials used in the manufacture of hinged doors are sturdy and provide superior sealing. Each door is individually designed and manufactured in-house. From designing to manufacturing, the concern for quality is vital in product development.

In addition to providing good insulation properties and enhanced waterproof seal, the doors are designed to withstand daily activities throughout the years. They are manufactured for the most demanding environments (heavy duty usage, high salinity, moisture and strong chemicals). Norbec considers industry regulations such as health standards, energy standards and building standards throughout the entire process.

ADVANTAGES OF NORBEC HINGED DOORS

- Highly resistant structure
- Easy and quick installation
- Several options available for multiple applications
- Resistant to corrosion and chemicals

DOOR

These doors are used to access rapidly small quantities of produce in restaurants or grocery stores as well as for the refill of crates on conveyor belts. Shelving units can be added in order to facilitate the advantages mentioned above. The doors are 1 5/8" in thickness and accompanied by joints made Polyvinyle, resistant to oils and other liquids. To be noted, panels can have one or two doors.

FRAME

The door is mounted directly to a 47" wide cam-lock panel with a 1/4" aluminum jamb that incorporates a thermal break under the seal and a groove for easily accessible heating wire. All the pre-spun components in the frame are grouped together at a single point of connection.

DIMENSIONS

Door Thickness 3", 4" or 5"
Width: 18", 24", 30" or 36"
Height: 18", 24", 36", 48" or 60"

Other dimensions available upon request.

HARDWARE

HINGES	HANDLES
2 Kason #214 chrome	Kason #174 chrome with lock

OPTIONAL ACCESSORIES

► Varitety of colours and finishes available, refer to norbec’s colour chart for camlock panels.

INSTALLATION

The doors are integrated into the panel during the manufacturing process and therefore, simply need to be hooked with other camlock panels .

TECHNICAL DETAILS

