



# FOOD PROCESSING AND COLD STORAGE

(Controlled environment projects)

SLIDING DOORS


HINGED DOORS



BLAST FREEZER DOORS



PERSONNEL DOORS

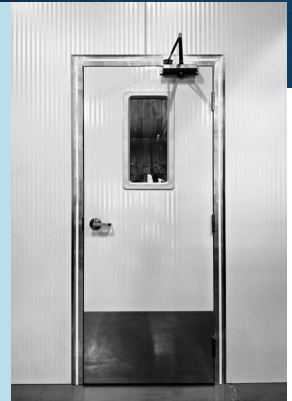

Application	Door types	Typical Dimensions**	Options***
FREEZER	Sliding doors C L-1750	Width: 36" to 120" Height: 72" to 120"	Electrical Opening Double Leafs
	Hinged doors PL-1750	Width: 24" to 60" Height: 72" to 192"	Double Leafs
	Blast freezer doors B2L-1750	Width: 36" to 60" Height: 72" to 96"	
COOLER	Sliding doors C L-1750	Width: 36" to 120" Height: 72" to 120"	Meat Rails Opening Electrical Opening Double Leafs Heated Frame
	Hinged doors PL-1750	Width: 24" to 60" Height: 72" to 192"	Meat Rails Opening Double Leafs Heated frame
AMBIENT TEMP	Personnel doors HC-200	Width: 30" to 42" Height: 84"	Electrical Strike Double Leafs

\*\*Other dimensions available. \*\*\*Options listed are the most frequently purchased. Other options are available

## ACCESSORIES

A wide range of accessories are available from standard to specific products. Listed below are the most commonly used accessories in cold storage applications.

- 1 Window Frames
- 2 Door Accessories

- 3 Bumper Protection
- 4 Pressure Relief Valve